
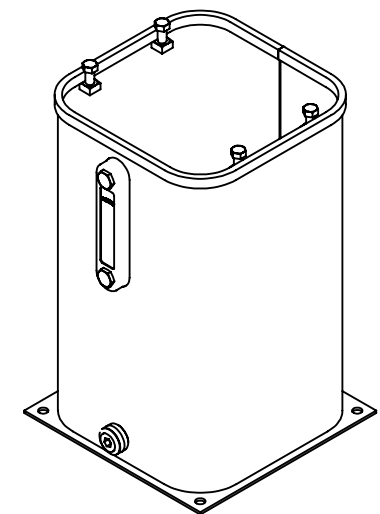


#### NOTES:

1. THIS RESERVOIR IS DESIGNED FOR STATIONARY INSTALLATIONS, ANY MOBILE INSTALLATIONS ARE SUBJECT TO FACTORY REVIEW.
2. THIS RESERVOIR IS THOROUGHLY CLEANED, A RUST INHIBITOR APPLIED TO THE INTERIOR, AND PRIME PAINTED GRAY PRIOR TO SHIPMENT. ANY SUBSEQUENT CUTTING OR WELDING ON THE UNIT COULD CAUSE CONTAMINATION AND WILL VOID THE WARRANTY.
3. OPERATING TEMPERATURE IS 180° F MAXIMUM. FOR HIGHER TEMPERATURES CONSULT FACTORY.
4. SHIPPED LOOSE:  
(1) SIGHT GAGE (MOLDED, TRANSPARENT NYLON W/BLACK POWDER COAT STEEL GUARD & BUNA N SEALS)  
(4) 3/8-16X1.00LG HHCS FOR COVER
5. RECOMMENDED ASSEMBLY TORQUE: SIGHT GAGE (80 IN LB)
6. COVER PLATE (SERIES 4) ORDERED AS SEPARATE ITEM

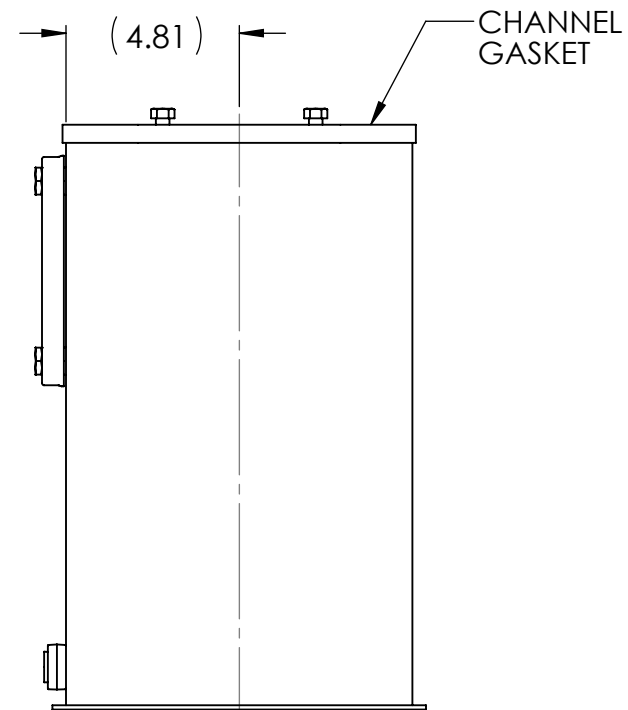

ISOMETRIC VIEW  
SCALE 1 : 8

ALL DIMENSIONS FOR REFERENCE ONLY

<b>LDI Industries</b>	
MANITOWOC, WI	HUNTLEY, IL
MATERIAL	STEEL
FINISH	-
CUST NO	-

NAME	DATE	TITLE:	
DRAWN BY	TLS	05/16/2014	
CHECKED BY	TLS	05/16/2014	
REVISED BY	-	-	
THIS DOCUMENT CONTAINS INFORMATION PROPRIETARY TO LDI INDUSTRIES, INC. AND IS FURNISHED UPON THE EXPRESS CONDITION THAT THE INFORMATION CONTAINED HEREIN WILL NOT BE DISCLOSED TO ANY THIRD PARTY OR USED DIRECTLY OR INDIRECTLY IN ANY WAY DETRIMENTAL TO THE INTEREST OF LDI INDUSTRIES, INC.		LDI STANDARD PRODUCT	
ECN NO		-	
SIZE	DWG. NO.	REV	
<b>B</b>	<b>V29905_REF</b>	<b>C</b>	
DO NOT SCALE DRAWING		SCALE: 3:16	WT(LB): 23.93
		SHT 1 OF 1	