
VERTICAL MOUNTING ADAPTER RINGS


Vertical Adapter Rings are designed to convert a horizontal style pump motor adapter for use in a vertical application.

Standard Feature:


Standard Material:

- Machined pilots that easily mount to the motor end of Cast Aluminum and Carbon Steel the adapter







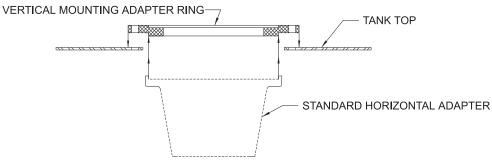

| Vertical Mounting Adapter Rings | | | | | | | | |
|------------------------------------------------------------|-----------------------|-----------------------|-----------------------------------------------------------|----------------------------------------------------------|-------------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Dimensions | | | | | | Part | | |
| Motor Size | A | В | С | D | M1 | No. | General Information | Mounting Info. |
| 182TC thru 256TC 213UC thru 256UC | 11.50 inch Dia. | 8.50 inch Dia. | 4 Slots .53 inch dia. on 10.25 to 10.50 B.C. | 4 Holes .56 inch dia. on 7.25 inch dia. B.C. | .50 inch | 268299 | For use with 182TC/256TC and 213UC/256UC pump motor adapters. (add .50 inch to "M" dimension of adapter) See page 98 for optional Vertical Mounting Gasket | Tank top requires 9.12 inch dia. hole with (4) .56 inch dia. holes equally spaced on a 10.25 inch dia. bolt circle |
| 284TC/TSC 286TC/TSC 284UC/286UC | 13.50 inch Dia | 10.50 inch Dia. | 4 Holes .56 inch dia. on 12.50 inch dia. B.C. | 4 Holes .56 inch dia. on 9 inch dia. B.C. | .50 inch | 268399 | For use with 284/286TC thru 284/286/ TSC and 284/286UC pump motor adapters (add .50 inch to "M" dimension of adapter) See page 98 for optional Vertical Mounting Gasket | Tank top requires a 11.12 inch dia. hole with (4) .56 inch dia. holes equally spaced on a 12.50 inch dia. bolt circle |
| 324TC/TSC thru 405TC/TSC 324UC/USC thru 405UC/USC | 16.75 inch Dia. | 12.50 inch Dia. | 4 Holes .69 inch dia. on 15.50 inch dia. B.C. | 4 Holes .69 inch dia. on 11 inch dia. B.C. | .62 inch | 268499 | For use with 324TC/TSC thru 405TC/TSC and 324UC/USC thru 405UC/USC pump motor adapters. (add .62 inch to "M" dimension of adapter) See page 98 for optional Vertical Mounting Gasket | Tank top requires 14.12 inch dia. hole with (4) .69 inch dia. holes equally spaced on a 15.50 inch dia. bolt circle |

Dimensions and specifications are subject to change without notice. Not all items are Made-To-Stock, contact us for availability.

