

SIGHT GAGES - CLOSED CIRCUIT

GT623 SERIES

GT623 Series front mount closed circuit low profile sight gages are molded from a clear Nylon providing 180° of viewing. A white insert integral to the sight gage helps draw eye contact to the fluid level quickly.

Standard Features:

- Front mount
- Tough, break resistant, transparent molded Nylon gage body
- 180° of viewing fluid level
- Viewing enhanced by white background integral to molded gage body
- Card thermometer, dual scale 0°F to 220°F and -20°C to 110°C
- Suitable for use with most hydraulic and machine lubricating oils

Standard Materials:

- Constructed with a molded, transparent Nylon
- Red color alcohol within thermometer bulb
- Buna N seals


Temperature and Pressure Ratings:

- 212°F (100°C) maximum operating temperature
- 50 psi (345 kPa) maximum operating pressure at 70°F (21°C)
- Please refer to Temperature Ratings by Seal Material for additional operating conditions (Appendix RA-5 on page RA-A5)

NOTE:

- Please refer to Appendix RA-9 on page RA-A9 for installation instructions

CAUTION: • Not recommended for use with alcohol or steam

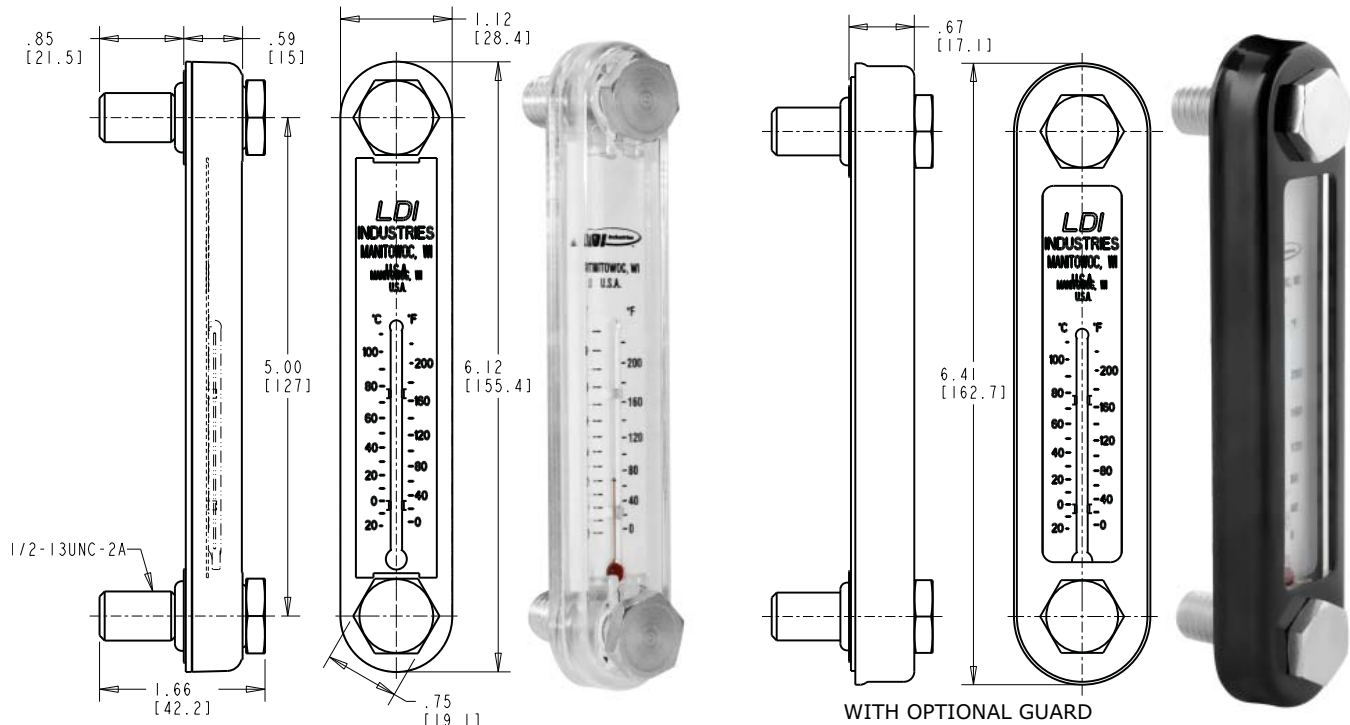

NOTE: All dimensions are inches [mm]

ORDERING OPTIONS CODES:

SEAL MATERIAL

- 1- Buna N seals (standard)
- 3- Viton® seals (optional)
- M- M12 x 1.75 bolts (optional)
- G- Guard (optional)

HOW TO ORDER

EXAMPLE:

- GT623-05-PG-1C**
- 1/2-13 UNC bolts, std
 - Buna N Seals
 - Guard
 - Polymer body
 - 5.00 (127.00 mm) mounting centers
 - Series GT623

Dimensions and specifications are subject to change without notice. Not all items are Made-To-Stock, contact us for availability.

02/15

Ph : 920-682-6877
Fx : 920-684-7210



sales@ldi-industries.com
www.ldi-industries.com