

# OIL GAGE - UNION COUPLING .88 (22.35mm) SQUARE BASE

LDI INDUSTRIES' stocks a complete line of vented and pressure type oil gages. Gages are designed so they can be disassembled on site, the elbow alone installed, and the gage reassembled - A big plus when the installation is in a confined area. The union coupling model features a convenient break point. Protective gage shields can be rotated a full 360° for optimum viewing. The sight opening design allows for the lowest oil level reading possible. For positive sealing, the exclusive LDI Industries' pressure chamber construction employs two trepanned pressure bosses, one in the shank cavity and the other in the closure cap. This unique feature prevents lateral extrusion of the seals under compression and insures against leakers.


## STANDARD MATERIALS:

- Brass construction
- Soda lime glass
- Buna N seals

## OPERATING CONDITIONS:

- Maximum working temperature with standard seals up to 250°F (121.1°C)

**MODIFICATIONS AVAILABLE MADE TO ORDER - CONSULT OUR FACTORY  
(MINIMUM ORDER MAY BE REQUIRED)**

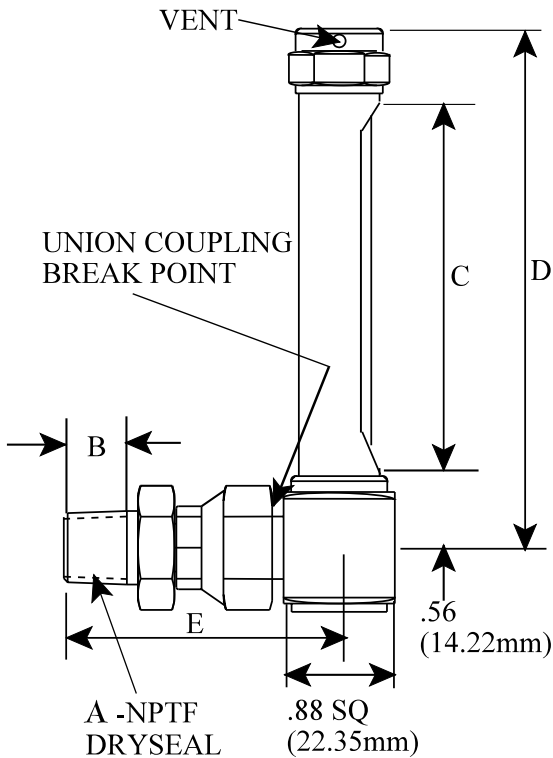

CATALOG NUMBER	A NPTF	B INCHES (mm)	C INCHES (mm)	D INCHES (mm)	E INCHES (mm)
G711-3	3/8	.56 (14.22)	4.25 (107.95)	5.44 (138.18)	2.56 (65.02)
G711-4	1/2	.75 (19.05)	4.25 (107.95)	5.44 (138.18)	2.56 (65.02)
G713-3	3/8	.56 (14.22)	7.50 (190.50)	8.69 (220.73)	2.56 (65.02)
G713-4	1/2	.75 (19.05)	7.50 (190.50)	8.69 (220.73)	2.56 (65.02)
G715-3	3/8	.56 (14.22)	12.50 (317.50)	13.69 (347.73)	2.56 (65.02)
G715-4	1/2	.75 (19.05)	12.50 (317.50)	13.69 (347.73)	2.56 (65.02)

OIL GAGE - UNION COUPLING  
.88 (22.35mm) SQUARE BASE

5/06 **BULLETIN F1927-10**  
ISO9001:2000 CERTIFIED



Lube Devices • Flodar • Hydra-Tool • Vescor

1864 Nagle Ave. P. O. Box 1810

Manitowoc, WI 54221-1810

Phone: (920) 682-6877 Fax: (920) 684-7210

E-MAIL: sales@ldi-industries.com WEBSITE: www.ldi-industries.com