

FLOW SIGHTS - INLINE PIPE THREAD FOR PRESSURE

Inline double window flow sights can be used to determine flow, clarity of fluid and impurities in either horizontal or vertical pipe runs. Nylon ball flow indicator gives positive flow indication with dark or opaque fluids.

CAUTION: Scratched glass significantly reduces pressure rating.


STANDARD MATERIALS:

- Brass body
- Tempered borosilicate sight window
- Buna N seals

OPERATING CONDITIONS:

- Maximum working temperature up to 180°F (82.2°C).
For applications requiring maximum working temperature over 180°F (82.2°C), please consult factory.

**MODIFICATIONS AVAILABLE MADE TO ORDER - CONSULT OUR FACTORY
(MINIMUM ORDER MAY BE REQUIRED)**

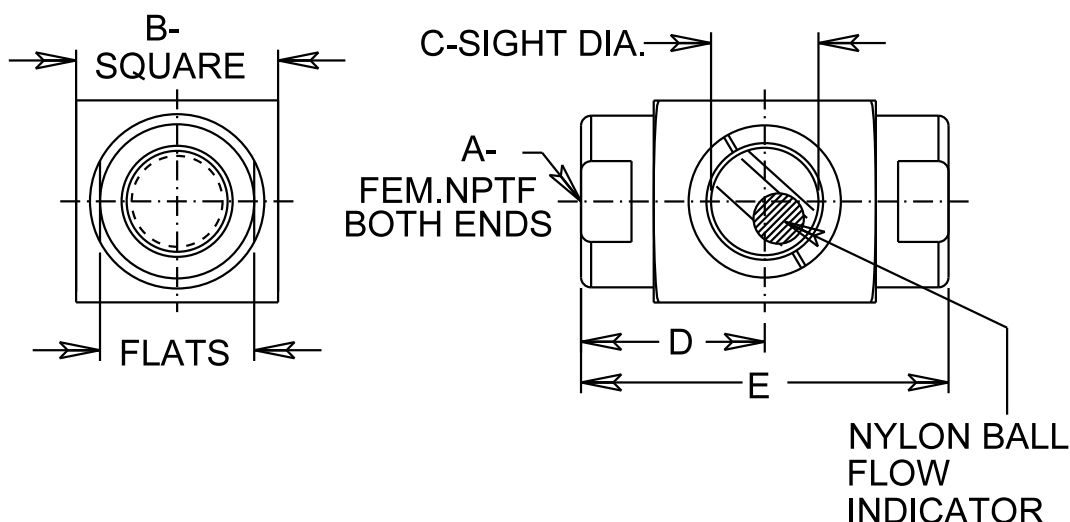

CATALOG NUMBER		A FEMALE NPTF	B INCHES (mm)	C INCHES (mm)	D INCHES (mm)	E INCHES (mm)	MAX. WORKING PSI @ 150° F (kPa @ 65.6° C)
NO BALL	BALL						
-	F251-04-01	1/2-14	2.00 (50.80)	.88 (22.35)	1.75 (44.45)	3.50 (88.90)	400 (2758)
-	F251-05-01	3/4-14	2.25 (57.15)	.88 (22.35)	1.75 (44.45)	3.50 (88.90)	400 (2758)
-	F251-06-01	1-11 1/2	2.50 (63.50)	1.38 (35.05)	2.31 (58.67)	4.62 (117.35)	160 (1103.2)
F251-08	F251-08-01	1 1/2-11 1/2	3.00 (76.20)	1.88 (47.75)	2.88 (73.15)	5.75 (146.05)	85 (586.1)



Lube Devices • Flodar • Hydra-Tool • Vescor
1864 Nagle Ave. P. O. Box 1810
Manitowoc, WI 54221-1810
Phone: (920) 682-6877 Fax: (920) 684-7210
E-MAIL: sales@ldi-industries.com WEBSITE: www.ldi-industries.com

FLOW SIGHTS - INLINE PIPE THREAD
FOR PRESSURE

5/05

BULLETIN F447-6

ISO9001:2000 CERTIFIED