

RESERVOIRS - DROP FEED - PIPE THREAD NPTF (DRYSEAL)

LUBE DEVICES' drop feed reservoirs feature a vented sight chamber, adjustable metering and toggle shut-off. All reservoirs feature self-closing snap lid filler caps, vented on the vertical plane to minimize the possibility of dust and dirt from entering the reservoir through the vent. Reservoirs can be disassembled for occasional cleaning. Maximum viscosity 1500 SSU.


CATALOG PAGE		Capacity	A Inches (mm)	B Inches (mm)	C Inches (mm)	D Thread NPTF
Polymer	Glass					
RDF101-01	RDF101-11	5/8 ounce (18.5 milliliter)	1.50 (38.10)	4.56 (115.82)	1.38 (35.05)	1/8
RDF102-01	-	1 ounce (29.6 milliliter)	1.50 (38.10)	5.00 (127.00)	1.38 (35.05)	1/8
RDF102-02	RDF102-12			5.19 (131.83)	1.56 (39.62)	1/4
RDF103-02	RDF103-12	1-1/2 ounce (44.4 milliliter)	1.75 (44.45)	5.38 (136.65)	1.56 (39.62)	1/4
RDF104-01	-	2-1/2 ounce (73.9 milliliter)	2.00 (50.80)	5.56 (141.22)	1.38 (35.05)	1/8
RDF104-03	RDF104-13			5.75 (146.05)	1.56 (39.62)	3/8
RDF105-02	-	5 ounce (147.9 milliliter)	2.50 (63.50)	6.38 (162.05)	1.56 (39.62)	1/4
RDF105-03	RDF105-13					3/8
RDF106-01	-	8 ounce (236.6 milliliter)	2.50 (63.50)	7.31 (185.67)	1.38 (35.05)	1/8
RDF107-03	RDF107-13	9 ounce (266.2 milliliter)	3.00 (76.20)	7.62 (193.55)	1.94 (49.28)	3/8
RDF107-04	RDF107-14			7.81 (198.37)	2.12 (53.85)	1/2
RDF108-02	-	12 ounce (354.9 milliliter)	3.00 (76.20)	8.94 (227.08)	1.94 (49.28)	1/4
RDF108-03	-			8.94 (227.08)	1.94 (49.28)	3/8
RDF108-04	-			9.12 (231.65)	2.12 (53.85)	1/2
RDF109-02	-			8.94 (227.08)	1.94 (49.28)	1/4
RDF109-03	RDF109-13	1 pint (.47 liter)	3.50 (88.90)	8.94 (227.08)	1.94 (49.28)	3/8
RDF109-04	RDF109-14			9.12 (231.65)	2.12 (53.85)	1/2
RDF110-03	-	1 quart (.95 liter)	4.25 (107.95)	9.94 (252.48)	1.94 (49.28)	3/8
RDF110-04	RDF110-14			10.12 (257.05)	2.12 (53.85)	1/2
RDF111-04	RDF111-14	1/2 gallon (1.9 liter)	5.50 (139.70)	12.06 (306.32)	2.12 (53.85)	1/2
RDF112-04	-	1 gallon (3.8 liter)	5.50 (139.70)	17.06 (433.32)	2.12 (53.85)	1/2

STANDARD MATERIALS:

- Aluminum construction
- Buna N seals
- Gage glass sight
- Break resistant, colorless transparent polymer
- Borosilicate glass for fluid compatibility and thermal shock

OPERATING CONDITIONS:

- Polymer up to 160°F (71.1°C)
- Glass up to 250°F (121.1°C)
- Ratings are at atmospheric pressure

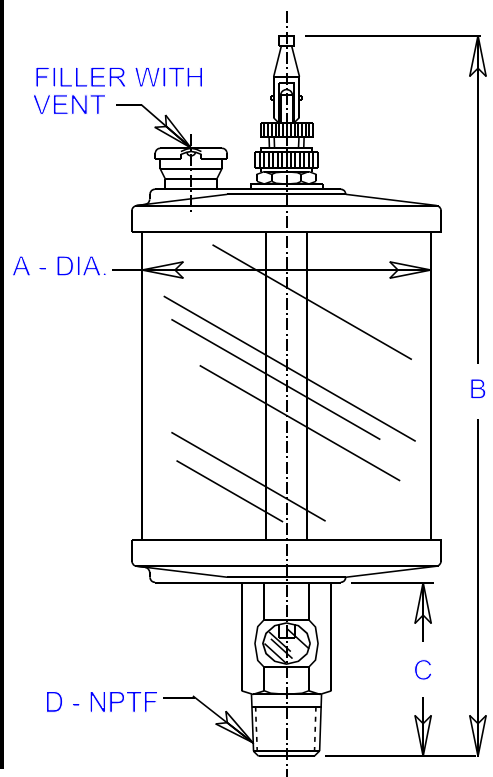

MODIFICATIONS AVAILABLE MADE TO ORDER
CONSULT OUR FACTORY
(MINIMUM ORDER MAY BE REQUIRED)



LUBE DEVICES, INC.

1864 NAGLE AVE., P.O. BOX 1810, MANITOWOC, WI 54221-1810
PHONE: (920) 682-6877 FAX: (920) 684-7210
E-MAIL: sales@lubedevices.com WEBSITE: www.lubedevices.com

RESERVOIR - DROP FEED
PIPE THREAD - NPTF (DRYSEAL)
BULLETIN F277-1

12/03