

LIQUID LEVEL GAGE - FRONT MOUNT, RIGID PLASTIC


STANDARD MATERIALS:

- Tough, break resistant, transparent rigid nylon sight offers wide angle viewing
- Aluminum end blocks and mounting bolts
- Buna N seals

OPERATING CONDITIONS:

- Maximum working pressure up to 125 PSI (861.9kPa) at 70°F (21.1°C)
- Maximum working temperature up to 225°F (107.2°C)
- Suitable for use with most hydraulic and machine lubricating oils.

CAUTION: Transparent nylon is NOT recommended for use with: Diesel Fuel, Gasoline, Ethylene Glycol (antifreeze), Polyglycols, Ethyl Alcohol, Methyl Alcohol, Methyl Ethyl Ketone (MEK), Acetone, Isopropanol, Water at 194°F (90°C) and over, Steam boiler service. For these fluids, our BOROSILICATE sight glass should be specified.

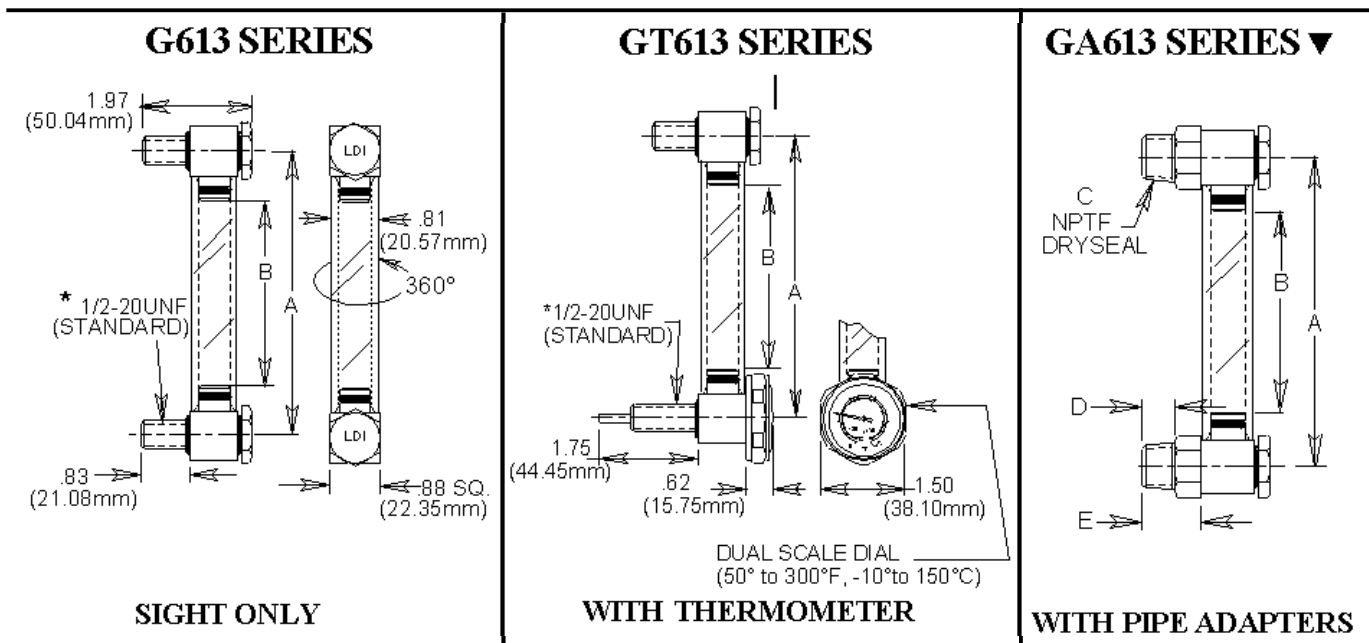

HOW TO ORDER:
 WHEN ORDERING, SPECIFY THE FOLLOWING AFTER THE SERIES NUMBER, SEPARATING EACH WITH A DASH (-):

- A- Aluminum body (standard)
- B- Brass body (optional)
- 1- Buna N seals (standard)
- 2- Butyl seals (optional)
- 3- Viton A® seals (optional)
- 4- Ethylene Propylene seals (optional)

- 2- 1/4-18 NPTF
- 3- 3/8-18 NPTF
- 4- 1/2-14 NPTF
- 5- 3/4-14 NPTF

EXAMPLE:

GA613-06-A-1-3 — 3/8" NPTF
 — Buna N seals
 — Aluminum body
 — 6.00 (152.40 mm) mounting centers
 — SERIES GA613
 AVAILABLE TO MAXIMUM LENGTH OF 72.00 (1828.80 mm)

OTHER SERIES AVAILABLE - MADE TO ORDER: ▼
 MINIMUM ORDER MAY BE REQUIRED

- Pipe adapters with thermometer - (Series GAT613)
- Needle valves - 1/4 to 3/4 NPTF - (Series GNV613)

THREAD OPTIONS AVAILABLE PER SPECIAL ORDER: *

- 1/2-20UNF (Standard)
- 1/2-13UNC
- 3/8-16UNC
- 3/8-24UNF
- M12 x 1.75

SERIES NUMBER	A INCHES (mm)	B INCHES (mm)
GAGE SERIES NUMBER HERE, AS PER ORDERING INSTRUCTIONS	-03 (76.20)	1.28 (32.51)
	-04 (101.60)	2.28 (57.91)
	-05 (127.00)	3.28 (83.31)
	-06 (152.40)	4.28 (108.71)
	-07 (177.80)	5.28 (134.11)
	-08 (203.20)	6.28 (159.51)
	-09 (228.60)	7.28 (184.91)
	-10 (254.00)	8.28 (210.31)
	-11 (279.40)	9.28 (235.71)
	-12 (304.80)	10.28 (261.11)

C	D INCHES (mm)	E INCHES (mm)
1/4-18	.56 (14.22)	1.19 (30.23)
3/8-18	.56 (14.22)	1.12 (28.45)
1/2-14	.75 (19.05)	1.12 (28.45)
3/4-14		



E-MAIL: sales@ldi-industries.com WEBSITE: www.ldi-industries.com

Lube Devices • Flodar • Hydra-Tool • Vescor
 1864 Nagle Ave. P. O. Box 1810
 Manitowoc, WI 54221-1810
 Phone: (920) 682-6877 Fax: (920) 684-7210

LIQUID LEVEL GAGE -
 FRONT MOUNT, RIGID PLASTIC
 BULLETIN F327-13
 ISO9001:2000 CERTIFIED