

INLINE FLOW SIGHT


Inline flow sights can be used in either vertical or horizontal fluid lines to observe fluid flow, clarity or condition of medium. A ball float can be supplied to aid observation of flow of dark fluids or fluids in dimly lit conditions. Add -01 (nylon ball) after catalog number. Modifications of body seals and ball material can be requested as made to order, minimum order quantity may be required - **Please specify.**
CAUTION: Scratched glass significantly reduces pressure rating.

STANDARD FEATURES:

- Brass construction
- Buna N seals
- Borosilicate sight

OPERATING CONDITIONS:

- Maximum working temperature up to 180°F (82.2°C). For applications requiring maximum working temperature over 180°F (82.2°C), please consult factory.

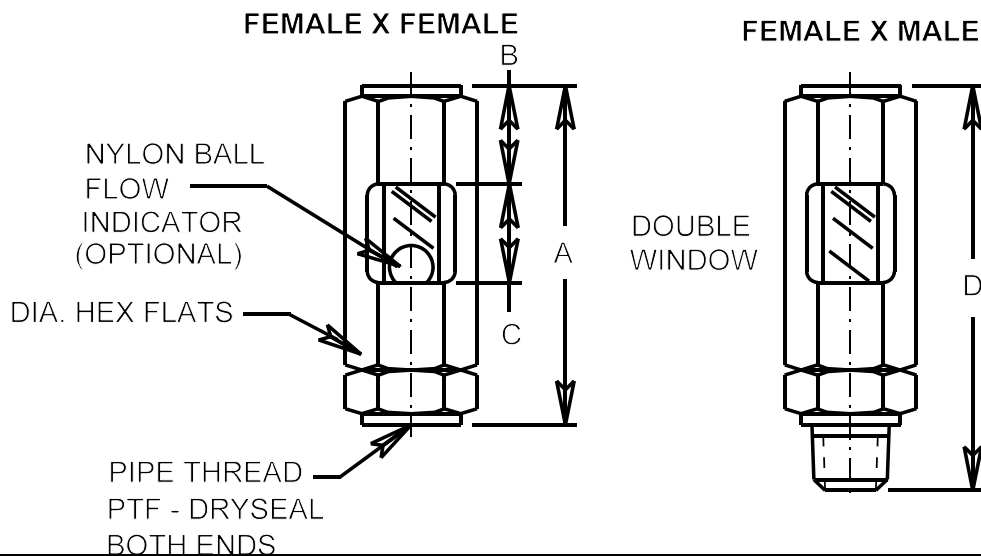

CATALOG NUMBER		PIPE THREAD	HEX FLATS INCHES (mm)	ORIFICE DIAMETER W/O BALL INCHES (mm)	A INCHES (mm)	B INCHES (mm)	C INCHES (mm)	D INCHES (mm)	MAX. WORKING PSI (kPa) @ 150° F (65.6° C)
FEMALE X FEMALE	FEMALE X MALE								
F151	-	1/8-27	.88 (22.35)	.234 (5.94)	3.34 (84.84)	.78 (19.81)	1.04 (26.42)	3.66 (92.96)	435 (2999)
F152	F162	1/4-18	.88 (22.35)	.234 (5.94)	3.56 (90.42)	1.00 (25.40)	1.04 (26.42)	4.00 (101.60)	435 (2999)
F153	F163	3/8-18	1.06 (26.92)	.312 (7.92)	4.25 (107.95)	1.12 (28.45)	1.12 (28.45)	4.75 (120.65)	425 (2930)
F154	-	1/2-14	1.25 (31.75)	.375 (9.52)	4.62 (117.35)	1.25 (31.75)	1.30 (33.02)	5.12 (130.05)	380 (2620)
F155	-	3/4-14	1.38 (35.05)	.500 (12.70)	5.25 (133.35)	1.35 (34.29)	1.36 (34.54)	5.41 (137.41)	345 (2379)
F156	-	1-11 1/2	1.62 (41.15)	.531 (13.49)	6.31 (160.27)	1.69 (42.93)	1.48 (37.59)	6.31 (160.27)	270 (1862)

