


WIDE VIEW FLOW SIGHTS - FEMALE x FEMALE NPTF

Wide view flow sights can be used in either horizontal or vertical pipe runs to observe fluid flow clarity. Large cylindrical sight allows 360° viewing and flow is readily seen from a distance, in elevated or dimly lighted conditions. In vertical pipe run, fluid flow should come in from bottom to note ball action as a flow indicator.

The ball stop slightly restricts flow.

CAUTION: Scratched glass significantly reduces pressure rating.

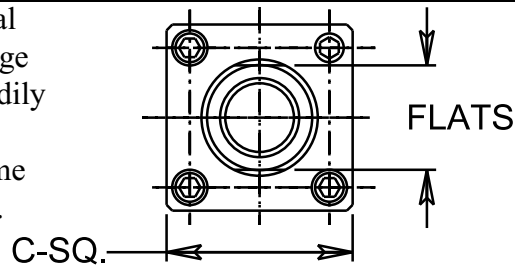


STANDARD MATERIALS:

- Brass construction
- Borosilicate sight
- Buna N seals
- Nylon ball indicator

OPERATING CONDITIONS:

- Noted below in chart

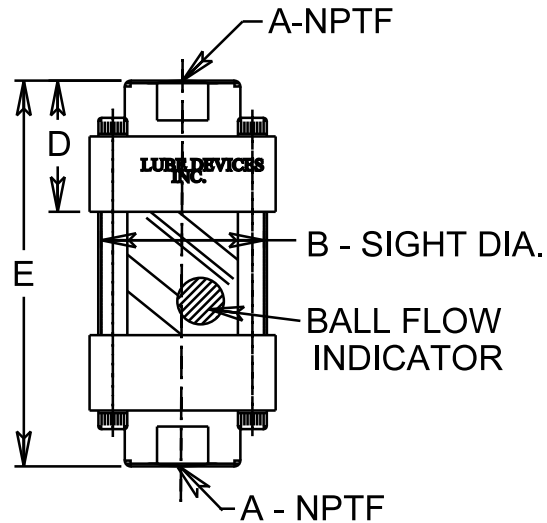

**MODIFICATIONS AVAILABLE MADE TO ORDER - CONSULT OUR FACTORY
(MINIMUM ORDER MAY BE REQUIRED)**

CATALOG NUMBER	A FEMALE NPTF	B INCHES (mm)	C INCHES (mm)	D INCHES (mm)	E INCHES (mm)	MAX. WORKING PSI (kPa) @ TEMP. SHOWN	
						PSI (kPa)	°F (°C)
F301-04-01	1/2-14	1.75 (44.45)	2.00 (50.80)	1.44 (36.58)	4.25 (107.95)	130 (896.4)	212 (100.0)
F301-05-01	3/4-14	1.75 (44.45)	2.00 (50.80)	1.44 (36.58)	4.25 (107.95)	130 (896.4)	212 (100.0)
F301-06-01	1-11 1/2	1.75 (44.45)	2.25 (57.15)	1.75 (44.45)	4.88 (123.95)	130 (896.4)	212 (100.0)
F301-07-01	1 1/4-11 1/2	2.50 (63.50)	3.00 (76.20)	1.75 (44.45)	5.62 (142.75)	100 (689.5)	185 (85.0)
F301-08-01	1 1/2-11 1/2	2.50 (63.50)	3.00 (76.20)	1.88 (47.75)	5.88 (149.35)	100 (689.5)	185 (85.0)
F301-09-01	2-11 1/2	3.50 (88.90)	4.00 (101.60)	1.88 (47.75)	7.50 (190.50)	60 (413.7)	150 (65.6)

WIDE VIEW FLOW SIGHTS
FEMALE X FEMALE NPTF

5/07

BULLETIN F447-8

ISO9001:2000 CERTIFIED



Lube Devices • Flodar • Hydra-Tool • Vescor

1864 Nagle Ave. P. O. Box 1810

Manitowoc, WI 54221-1810

Phone: (920) 682-6877 Fax: (920) 684-7210

E-MAIL: sales@ldi-industries.com WEBSITE: www.ldi-industries.com