

INLINE FLOW SIGHT

Compact design inline flow sights may be used in either horizontal or vertical pipe runs to indicate flow. May also be used to check clarity of fluid. Machined from solid brass bar stock with large sight windows. For higher pressures and modifications, see **F150** series on bulletin **F447-1A**.


CAUTION: Scratched glass significantly reduces pressure rating.

STANDARD MATERIALS:

- Brass construction
- Buna N seals
- Borosilicate sight

OPERATING CONDITIONS:

- Maximum working temperature up to 200°F (93.3°C)
- Maximum working pressure up to 50 PSI (345 kPa) at 70°F (21.1°C)
- No corrosion

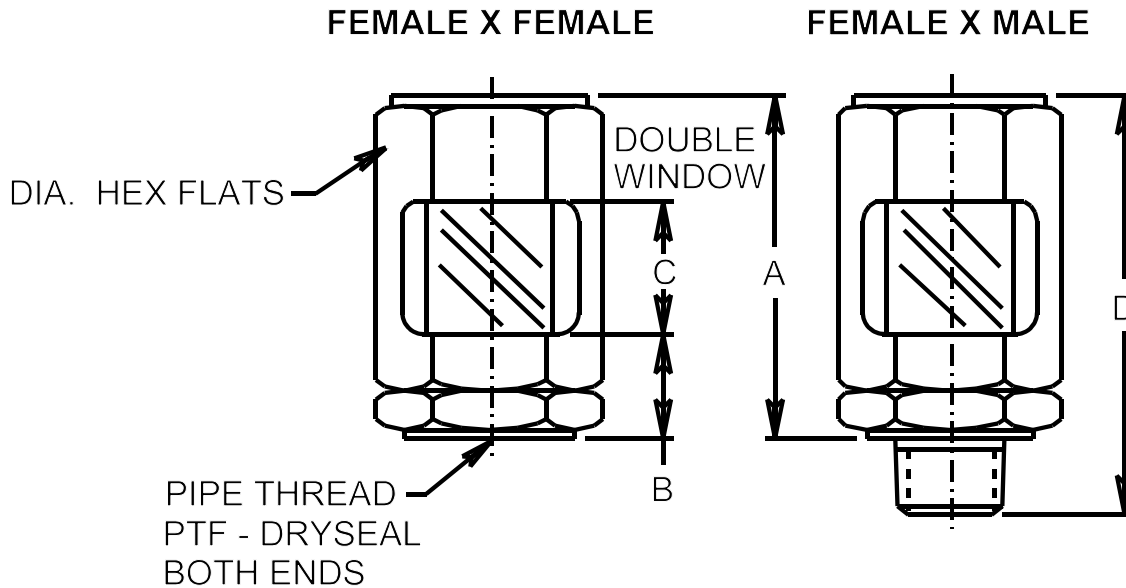

CATALOG NUMBER		PIPE THREAD	HEX FLATS INCHES (mm)	A INCHES (mm)	B INCHES (mm)	C INCHES (mm)	D INCHES (mm)
FEMALE X FEMALE	FEMALE X MALE						
F52	F62	1/4-18	.81 (20.57)	2.41 (61.21)	.66 (16.76)	1.06 (26.92)	2.91 (73.91)
F53	-	3/8-18	1.12 (28.45)	2.38 (60.45)	.69 (17.53)	1.12 (28.45)	2.88 (73.15)
F56	-	1-11 1/2	2.50 (63.50)	3.50 (88.90)	.88 (22.35)	1.75 (44.45)	4.31 (109.47)
F57	-	1 1/4-11 1/2	2.50 (63.50)	3.50 (88.90)	.88 (22.35)	1.75 (44.45)	4.34 (110.24)



LUBE DEVICES, INC.

1864 NAGLE AVE., P.O. BOX 1810, MANITOWOC, WI 54221-1810
 PHONE: (920) 682-6877 FAX: (920) 684-7210
 E-MAIL: sales@lubedevices.com WEBSITE: www.lubedevices.com

INLINE FLOW SIGHT BULLETIN F447

11/03