

LUBE SIGHT CHECK- HIGH PRESSURE FUSED - PIPE THREAD


Series LSP51, sight gage clear window units are used for internal inspection. Optional reflector clearly shows liquid level and condition. Float ball, reflex lens and other modifications are available upon request. **CAUTION:** For proper installation use socket or box (closed) end wrench, **NEVER** use an impact wrench. Scratched glass significantly reduces pressure rating. Do not use for steam applications.

STANDARD MATERIALS:

- Steel construction
- Heavy glass window fused to housing
- Electroless nickel plating

OPERATING CONDITIONS:

- Maximum operating temperatures up to 500°F (260°C)

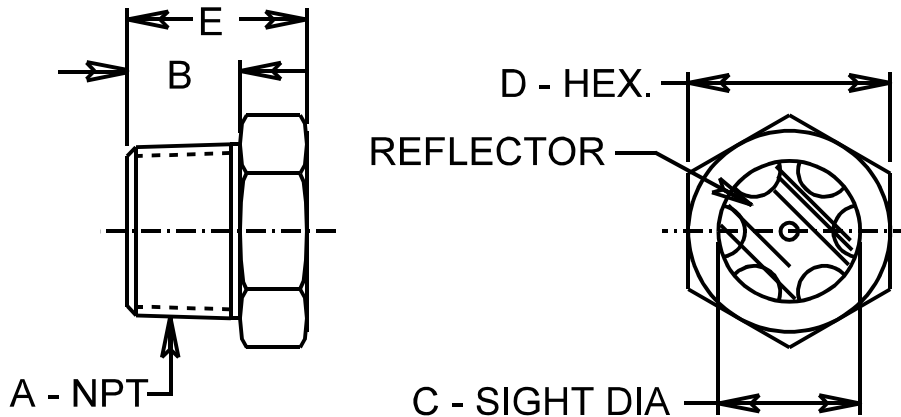

CATALOG NUMBER		A NPT	B INCHES (mm)	C INCHES (mm)	D INCHES (mm)	E INCHES (mm)	MAXIMUM WORKING PSI (kPa) @ 69°F (20.6°C)
OPEN VIEW	REFLECTOR						
LSP51-02	-	1/4-18	.44 (11.18)	.34 (8.64)	.62 (15.75)	.62 (15.75)	2000 (13800)
LSP51-03	LSP51-03-01	3/8-18	.51 (12.95)	.44 (11.18)	.75 (19.05)	.72 (18.29)	1850 (12765)
LSP51-04	LSP51-04-01	1/2-14	.51 (12.95)	.56 (14.22)	.94 (23.88)	.78 (19.81)	1750 (12075)
LSP51-05	LSP51-05-01	3/4-14	.62 (15.75)	.75 (19.05)	1.06 (26.92)	.94 (23.88)	1500 (10350)
LSP51-06	LSP51-06-01	1-11 1/2	.75 (19.05)	.94 (23.88)	1.38 (35.05)	1.06 (26.88)	1250 (8625)
LSP51-07	LSP51-07-01	1 1/4-11 1/2	.81 (20.57)	1.19 (30.23)	1.75 (44.45)	1.22 (30.99)	1000 (6900)
LSP51-08	LSP51-08-01	1 1/2-11 1/2	.81 (20.57)	1.44 (36.58)	2.00 (50.80)	1.22 (30.99)	750 (5175)
LSP51-09	LSP51-09-01	2-11 1/2	.88 (22.35)	1.88 (47.75)	2.50 (63.50)	1.28 (32.51)	500 (3450)



LUBE DEVICES, INC.

1864 NAGLE AVE., P.O. BOX 1810, MANITOWOC, WI 54221-1810
 PHONE: (920) 682-6877 FAX: (920) 684-7210
 E-MAIL: sales@lubedevices.com WEBSITE: www.lubedevices.com

LUBE SIGHT CHECK - HIGH PRESSURE
 FUSED - PIPE THREAD

5/02 **BULLETIN F677-1**