RESERVOIRS W/INTEGRATED SKIDS

STYLE D, CUSTOM L-SHAPED

The Style D, L-Shaped Series provides users with a vertical reservoir and an adjacent platform for mounting system components. They can be customized with standard construction options including a bolt-on or welded cover, variable platform lengths, with or without access covers (DIN or stamped) and with base kick plate or containment tray. The reservoir and platform are fully supported by and welded to a skid allowing for most system assemblies to be completed remotely and then transported to another location for drop in installation.


Standard Features:

- 1. (1) 5 inch G1620 Series sight gage
- (1) Riser with 5201 Filler Breather
 Bayonet style 40 micron
- 3. Baffle with cutout for circulation
- 4. (1) 3/4 inch NPT drain with plug
- 5. (1) Return connection
- 6. Channel gasket installed on reservoirs with bolt-on top
- 7. Exterior painted with a LDI gray primer
- 8. Interior coated with rust preventative oil

CAUTION:

 Reservoirs are not designed for internal positive or negative pressure applications.
 For these applications, consult the factory.

- 9. Materials
 - Carbon steel reservoir
 - Buna N seals
 - Aluminum sight gage
 - Zinc plated fill cap with nylon strainer basket
 - **NOTE** Drain plugs need to be sealed and tightened before use
 - Sight gage and filler breather shipped loose inside reservoir
 - Channel gasket installed on reservoirs with bolt-on top
 - Mounting hardware is supplied with bolt-on tops
 - Industry accepted design practice for hydraulic systems limits maximum operating temperature to 180° F (82° C), but materials used for fabrication of the reservoirs are capable of operating between -40° and 250° F (-40° and 121° C)

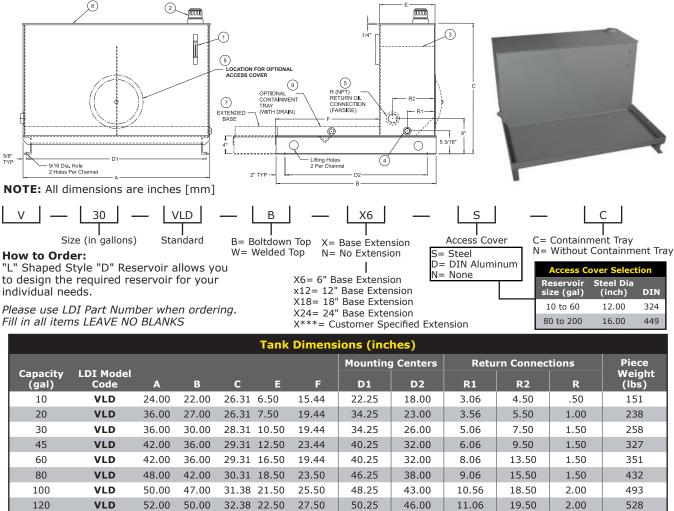

*Note: Dimensions above do not include extensions

60.00

60.00

50.00

57.00

33.38 22.50

40.38 25.50

VLD

VLD

Dimensions and specifications are subject to change without notice. Not all items are Made-To-Stock, contact us for availability.

27.50

31.50



150

200



58.25

58.25

46.00

53.00

11.06

12.56

19.50

22.50

sales@ldi-industries.com www.ldi-industries.com

2.00

2.00

08/22

605

771