RESERVOIRS - ELECTRO CHAIN OILER

LDI INDUSTRIES' electro chain oiler features nine long wearing nylon or stainless steel bristle brushes. For automatic operation: Wire normally closed solenoid across machine starting switch; feeding stops when machine is turned off. There are five sizes of flat brushes available allowing inexpensive brush replacement at a fraction of former cost. Flat brushes can be set at bias to adapt to width needed or be trimmed to suit individual preferences. The central mounting shank facilitates mounting to customer supplied bracket. Large reservoir provides a quick, visual check of fluid level and condition. Unit is easily disassembled for occasional cleaning. For replacement brushes see Bulletin F517-1.

STANDARD MATERIALS:

- Aluminum top and bottom plates
- Buna N seals
- Break resistant, colorless transparent polymer
- Class "B" molded water resistant coil

OPERATING CONDITIONS:

- Polymer maximum working temperature up to 140°F (60°C)
- Nylon brush maximum working temperature up to 250°C (121.1°C)
- Stainless steel brush for maximum working temperature over 250°F (121.1°C)
- Ratings are at atmospheric pressure

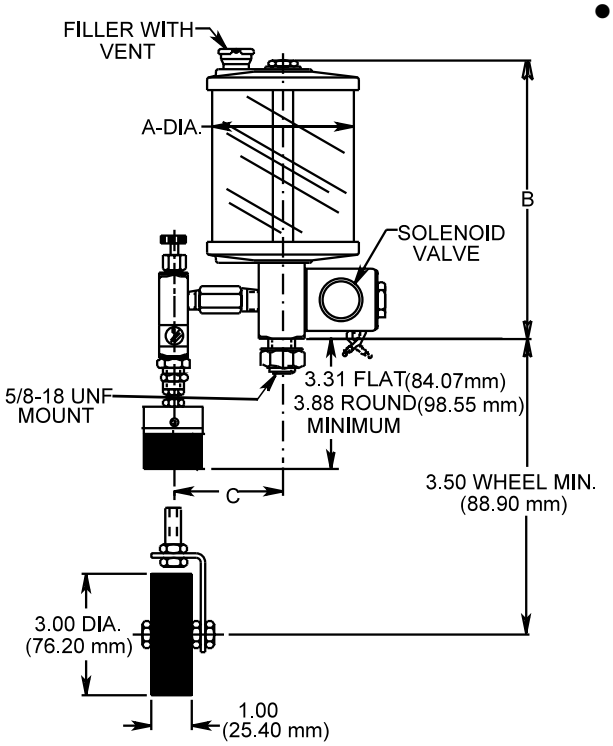

HOW TO ORDER:

WHEN ORDERING SPECIFY THE FOLLOWING AFTER THE CATALOG NUMBER, SEPARATING EACH WITH A DASH (-).

-N Nylon bristle
-S Stainless steel bristle
-1 .50 X .38 (12.70 mm X 9.65 mm) flat brush
-2 .75 X .38 (19.05 mm X 9.65 mm) flat brush
-3 1.00 X .38 (25.40 mm X 9.65 mm) flat brush
-4 1.50 X .38 (38.10 mm X 9.65 mm) flat brush
-5 2.25 X .38 (57.15 mm X 9.65 mm) flat brush
-6 .62 (15.75 mm) diameter round brush
-7 1.00 (25.40 mm) diameter round brush
-8 1.50 (38.10 mm) diameter round brush
-9 3.00 (76.20 mm) diameter X 1.00 (25.40 mm) rotary wheel

-26 120V, 60Hz, 1 Ph class B
-27 240V, 60Hz, 1 Ph class B
-28 480V, 60Hz, 1 Ph class B
-43 24V DC

EXAMPLE:

REB309- N - 4 -26 – 120V, 60Hz, 1 Ph
- 1.50 X .38 (38.10 mm X 9.65 mm) flat brush
- Nylon bristle
- Series REB309 (1 quart [.95 liter] capacity reservoir)

CATALOG NUMBER / POLYMER	CAPACITY	A INCHES (mm)	B INCHES (mm)	C INCHES (mm)
REB303	2-1/2 ounce (73.9 milliliter)	2.00 (50.80)	4.69 (119.13)	1.62 (41.15)
REB304	5 ounce (147.9 milliliter)	2.50 (63.50)	5.19 (131.83)	1.88 (47.75)
REB306	9 ounce (266.2 milliliter)	3.00 (76.20)	6.00 (152.40)	2.44 (61.98)
REB307	12 ounce (354.9 milliliter)	3.00 (76.20)	7.00 (177.80)	2.44 (61.98)
REB308	1 pint (.47 liter)	3.50 (88.90)	7.00 (177.80)	2.56 (65.02)
REB309	1 quart (.95 liter)	4.25 (107.95)	8.44 (214.38)	2.88 (73.15)
REB310	1/2 gallon (1.9 liter)	5.50 (139.70)	10.44 (265.18)	3.62 (91.95)
REB311	1 gallon (3.8 liter)	5.50 (139.70)	15.44 (392.18)	3.62 (91.95)

Lube Devices ● Flodar ● Hydra-Tool ● Vescor
1864 Nagle Ave. P. O. Box 1810
Manitowoc, WI 54221-1810
Phone: (920) 682-6877 Fax: (920) 684-7210
E-MAIL: sales@ldi-industries.com WEBSITE: www.ldi-industries.com