CENTRALIZED LUBRICATION SYSTEMS

PMP500 SERIES - PNEUMATIC NEMA MOUNT SYSTEMS

These "quick install" cost effective Centralized Lubrication Systems are pre-assembled with compatible components to minimize specification, purchasing and installation time. The automatic lubrication systems operate on 25 to 125 PSIG regulated & filtered shop air and a 120V, 60Hz 1Ph electrical supply for the included dual adjustable Repeat Cycle Timer and 3-Way Solenoid Valve. The systems are sized to meet most lubrication requirements. Each pump outlet is independently and externally adjustable 0 to .01 cu in (0 to .20 cu cm) by using a fine micrometer thread .02 (.57mm) pitch adjustment.

Standard Materials:


- · Aluminum, Brass, Steel, transparent polymer
- Buna N & Viton® seals
- Patined Steel Nema Type 12 & 13 Box

Temperature and Pressure Ratings:

- Maximum operating temperature up to 120°F (48°C)
- Minimum operating temperature 0°F (-17°C), oil
- Minimum operating temperature 32°F (0°C), grease
- Maximum output pressure up to 300 PSIG (2068 kPa)

CAUTION:

• For grease applications, the combination of higher viscosities, ambient temperatures lower than 32°F (0°C), excessively long runs of output feed lines, along with the type and use of smaller inside diameter feed lines, will have an effect on the feed rate and output capabilities of these pumps.

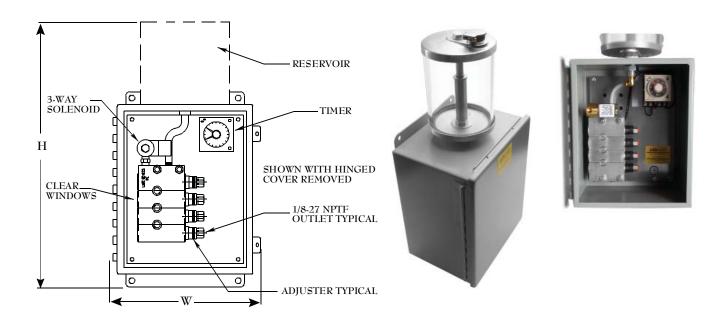

PMP500 Series (Oil Application)							
Part No.	Reservoir Capacity	No. of Feeds	Nema Panel W x H (inches)	O. A. Depth (inches)			
PMP540-04	1 quart	4	9.00 x 18.00	• 6.38			
PMP540-06		6					
PMP540-08		8					
PMP560-06	.5 gallon	6	9.00 x 20.12				
PMP560-08		8					
PMP560-12		12					

PMP500 Series (Grease Application)						
Part No.	Reservoir Capacity	No. of Feeds	Nema Panel W x H (inches)	O. A. Depth (inches)		
PMP530-02	75 in³	2	9.00 x 19.80	6.56		
PMP530-04		4				
PMP530-06		6				
PMP550-02	168 in³	2	9.00 x 24.55			
PMP550-04		4				
PMP550-06		6				

MODIFICATIONS AVAILABLE MADE TO ORDER - CONSULT OUR FACTORY (MINIMUM ORDER MAY BE REQUIRED)

Dimensions and specifications are subject to change without notice. Not all items are Made-To-Stock, contact us for availability.

02/14