RESERVOIRS - MANUAL MULTIPLE FEED

Multiple feed, large capacity reservoirs with central mounting shank provide for controlled lubrication for up to 30 points from one location. Manually operated toggle lever at the top of reservoir controls on/off full flow of oil to valves. Valve drip off feed rate is individually set at each valve. Large reservoir provides 360° viewing at a glance. Vent on the vertical plane so dust and dirt cannot enter the reservoir. Exclusive patented compact manifold design allows for easy removal of any of the valves. Units with odd number of feeds will be furnished with greater number of feeds to the right side unless otherwise specified. For outdoor or damp applications, **please specify anodized**. For replacement feeds, please order P/N 352890.

STANDARD MATERIALS:

- Aluminum construction
- Buna N seals
- Break resistant, colorless transparent polymer

OPERATING CONDITIONS:

- Maximum working temperature up to 140°F (60°C)
- Rating is at atmospheric pressure

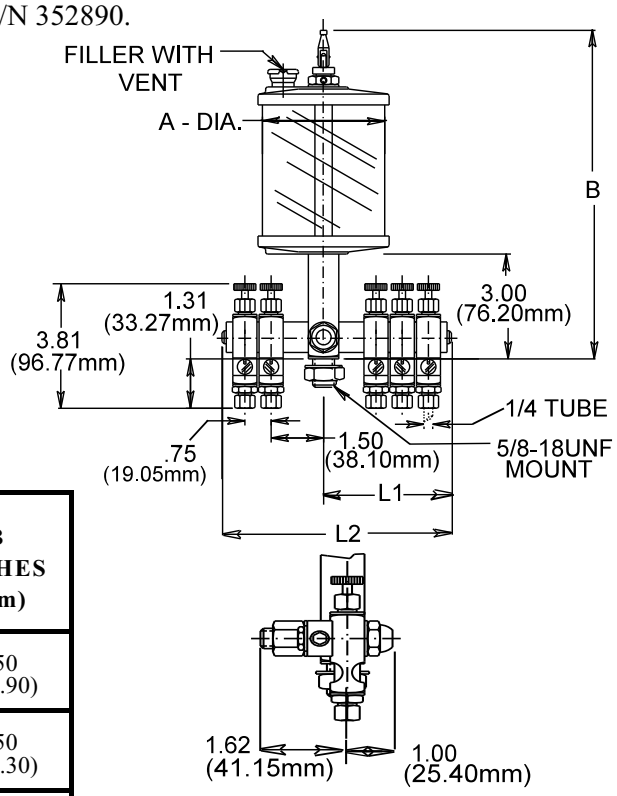

CATALOG NUMBER / POLYMER	CAPACITY	A INCHES (mm)	B INCHES (mm)
RDM101	9 ounce (266.16 milliliter)	3.00 (76.20)	8.50 (215.90)
RDM102	12 ounce (354.88 milliliter)	3.00 (76.20)	9.50 (241.30)
RDM103	1 pint (.47 liter)	3.50 (88.90)	9.50 (241.30)
RDM104	1 quart (.95 liter)	4.25 (107.95)	10.69 (271.53)
RDM105	1/2 gallon (1.9 liter)	5.50 (139.70)	12.75 (323.85)
RDM106	1 gallon (3.8 liter)	5.50 (139.70)	17.75 (450.85)

HOW TO ORDER:

After catalog number, specify number of feeds required, separated with a dash, (-).

-02 Specify 2 through 30 feeds. (2 feeds
-30 are standard).

EXAMPLE: RDM103-02 ——— 2 feeds (standard)

Series RDM103 - (1 pint [.47 liter] capacity reservoir)

MODIFICATIONS AVAILABLE MADE TO ORDER - CONSULT OUR FACTORY. (MINIMUM ORDER MAY BE REQUIRED)

FEEDS	-02 INCHES (mm)	-03 INCHES (mm)	-04 INCHES (mm)	-05 INCHES (mm)	-06 INCHES (mm)	-10 INCHES (mm)	-20 INCHES (mm)	-30 INCHES (mm)
L1	2.19 (55.62)	2.94 (74.68)	2.94 (74.68)	3.69 (93.73)	3.69 (93.73)	5.19 (131.83)	8.94 (227.08)	12.69 (322.33)
L2	4.38 (111.25)	5.12 (130.05)	5.88 (149.35)	6.62 (168.15)	7.38 (187.45)	10.38 (263.65)	17.88 (454.15)	25.38 (644.65)

LDI Industries

Lube Devices • Flodar • Hydra-Tool • Vescor
1864 Nagle Ave. P. O. Box 1810
Manitowoc, WI 54221-1810
Phone: (920) 682-6877 Fax: (920) 684-7210
E-MAIL: sales@ldi-industries.com WEBSITE: www.ldi-industries.com

RESERVOIR - MANUAL MULTIPLE FEED
5/07 **BULLETIN F587-1**
ISO9001:2000 CERTIFIED